

P35TC-50

Air Operated Grease Pump


RELIABLE

DEPENDABLE

CLEAN

Air Operated Grease Pump for 35 lb. Size Straight Side And Tapered Side Open Head Pail

- Can pump NLGI 00 to 2 lubricating grease
- Pump doesn't have a ram, but the full weight of the pump is used to force the inductor plate into the grease
- Has manual lift to raise pump for grease barrel change
- Includes compressed air filter, regulator, and gauge
- Includes automatic empty shut off valve
- Has 50 to 1 air to grease boost ratio. (30 p.s.i. air pressure will cause 1500 p.s.i. grease pressure)
- Inductor plate lip seal will function with straight and tapered pails
- Includes 12 ft. long high pressure grease hose

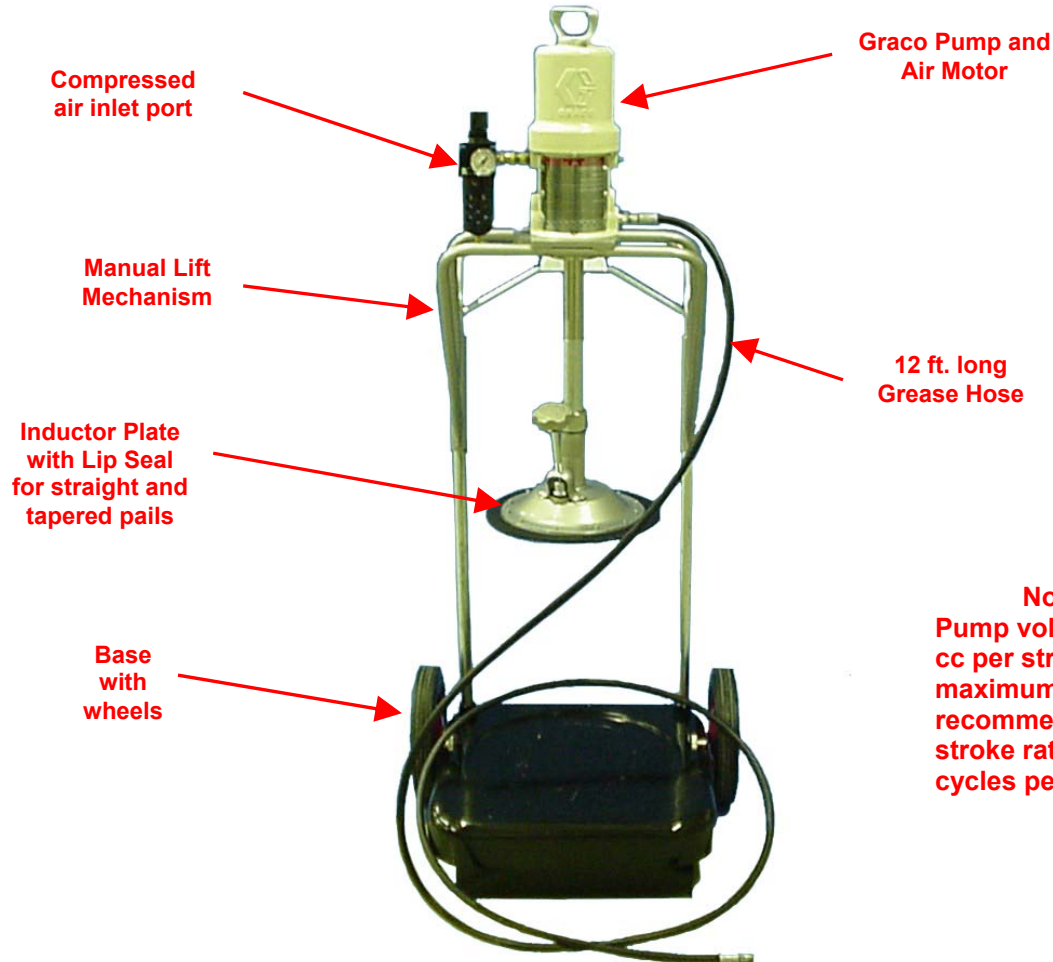

Note:
Pump volume is 11 cc per stroke and maximum recommended stroke rate is 60 cycles per minute

G. P. Reeves Inc. 12764 Greenly Street Holland, MI 49424

Phone: 888.399.8893

Fax: 616.399.8867

Web Site: <http://gpreeves.com>