

LUBE LOGIC®

Serving industry
since 1971




G. P. Reeves Inc.
12764 Greenly Street
Holland, MI 49424 USA

Phone: 888.399.8893
Fax: 616.399.8867
Web Site:
<http://gpreeves.com>

GPY35SPE-50 GREASE PUMP

Air Operated Grease Pump for 35 lb. Size Open Head Pail

- Will pump NLGI 00 through 3 lubricating grease
- Has ram to force inductor into grease
- Includes 8 ft. long high pressure grease hose
- Has selector valve to allow air cylinder to lift inductor for pail changes
- Requires 30 to 100 p.s.i. compressed air for operation
- Includes compressed air regulators and gauges
- Includes ram operated empty shut off valve
- Includes castors for portability
- Grease output is 9.4 cc per stroke. Grease volume is 282 cc per minute at 30 strokes per minute
- Has 50 to 1 boost ratio. (30 p.s.i. compressed air results in 1,500 p.s.i. grease)

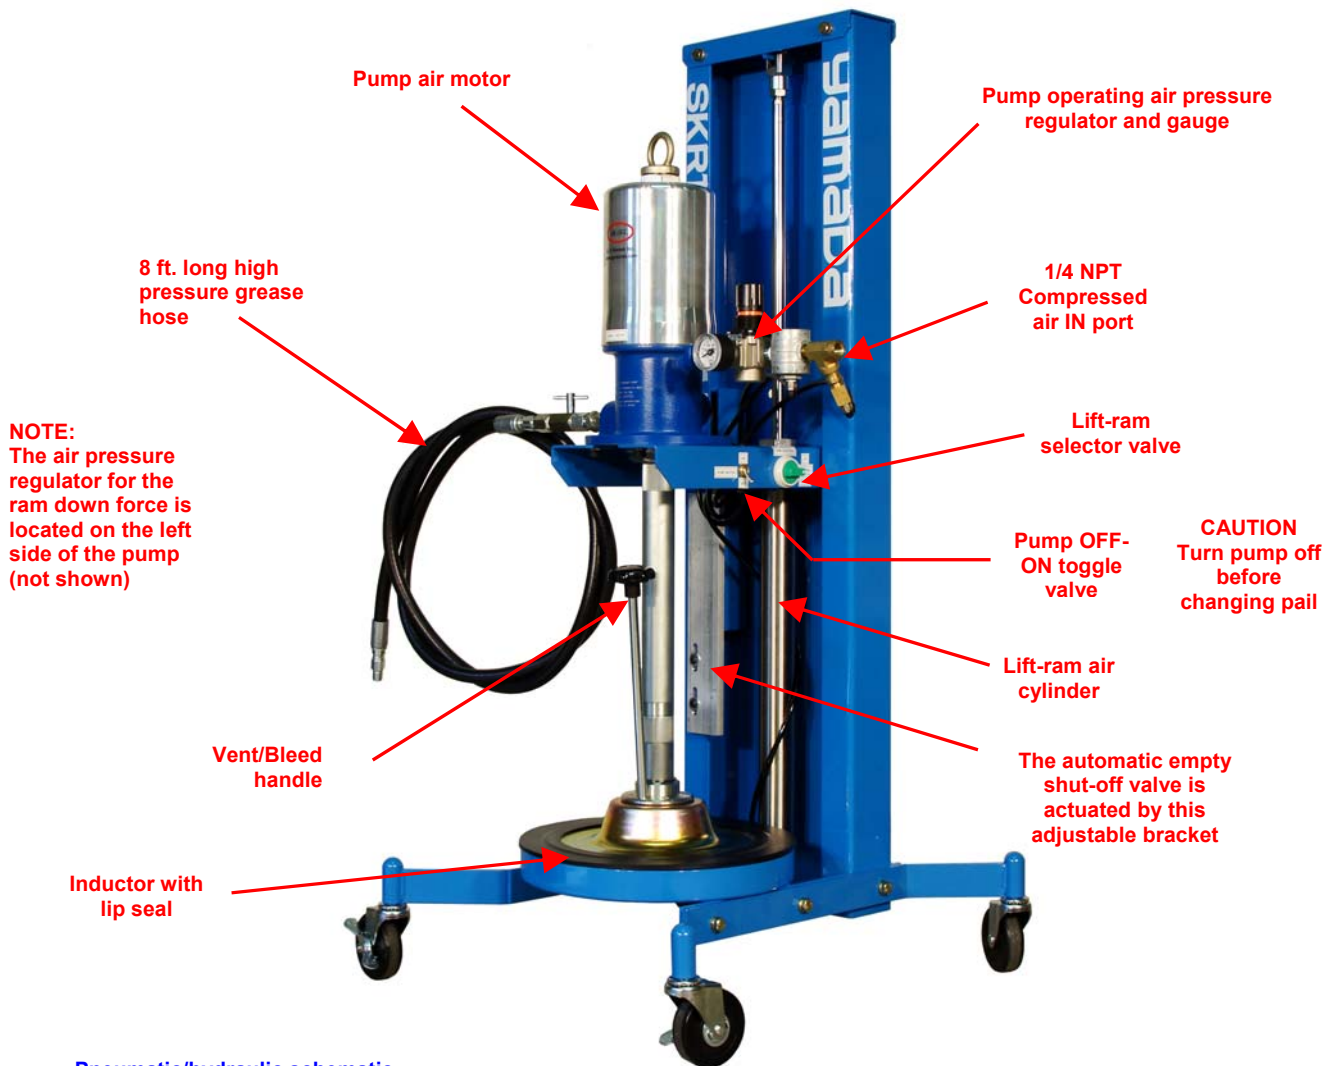

Pneumatic/hydraulic schematic diagram drawing number is KA7299