

# LUBE LOGIC®

Serving industry  
since 1971



**G. P. Reeves Inc.**  
12764 Greenly Street  
Holland, MI 49424 USA

Phone: 888.399.8893  
Fax: 616.399.8867  
Web Site:  
<http://gpreeves.com>

## GRRM1460 Grease Regulator / Reservoir

Recommended for use with GPMD1000, 1200, and 1500 series, GSS, and Stackable series grease dispensers

### Better Than a Regulator

- Reduces up to 3000 p.s.i. grease to usable 100 p.s.i. or less
- Includes translucent barrel for visual inspection of grease
- Engineered for NLGI 000 through 2 grease
- Uses compressed air to consistently provide up to 100 p.s.i. grease pressure

### Better Than a Reservoir

- Functions as buffer to allow continued operation during grease pail changes
- Can be "off-on" controlled by user's solenoid or manual air valve
- Available with manual and automatic fill
- Much more reliable than other grease regulators because it doesn't contain a troublesome "ball and seat"


GRR series grease reservoir / regulators (manual and automatic) are equipped with translucent barrels, relief valves, air pressure regulators with gauges, and are capable of handling up to 3000 p.s.i. primary pressure and regulating it to 100 p.s.i. or less. Grease outlet (secondary) pressure will be equal to adjusted air pressure.

**CAUTION:** Grease, at 100 p.s.i. or less, doesn't move far or quickly in small diameter tubing. Use tubing with I.D. of at least 3/8" and length of not longer than five feet.

Grease reservoir / regulator with 1460 cc (89.1 cubic inch) capacity translucent reservoir with grease inlet "zerk" fitting, air pressure regulator with gauge, and relief valve. Regulator is capable of 3000 p.s.i. primary. Secondary will be equal to adjusted air pressure. Approx envelope 6" x 6" x 20".

Grease "ZERK" Fitting for Filling Reservoir  
**WARNING!!!** Stop Filling Reservoir When Piston Is One Inch From Top Of Reservoir. Over-filling Will Cause Relief Valve to Open

1/2" NPT Grease  
OUTLET PORT

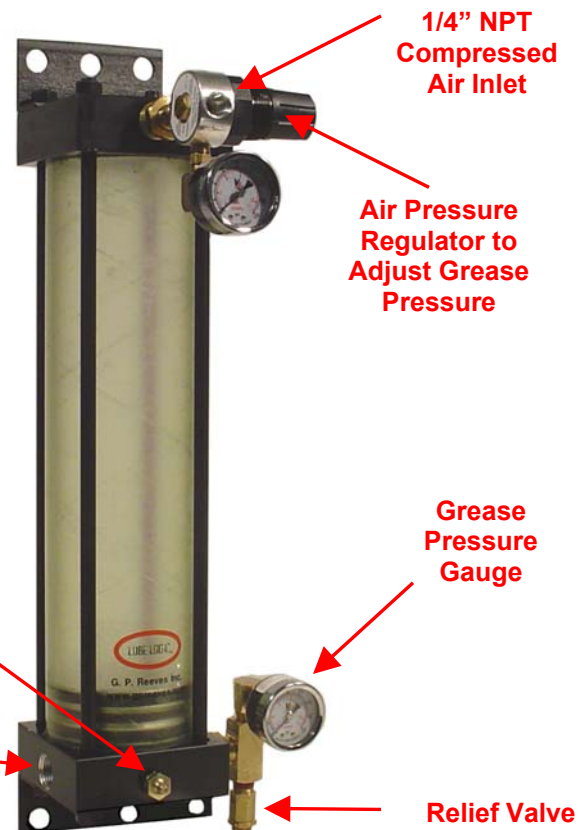

Relief Valve