


# GPMD1501 Grease Dispenser

PLC COMPATIBLE

**Nose-mounted air-operated single-acting metered shot dispenser**

- Accurate repetitive dispensing of .063 to 1.25 cubic centimeter shots
- Dispenser can be mounted onto any 1/4" NPT Female Port.
- Compressed Air Inlet is 1/4" Tube Push-Lock.
- Eliminates oozing or dripping problems by putting the dispenser at the dispense point.
- Swivel head allows dispenser ports to point in any direction
- Compact design allows this dispenser to be mounted at the dispense point or nozzle.
- Change shot size quickly and easily
- Operates with low pressure grease (up to 200 PSI)
- Output check valve prevents dripping or leaking
- Nose mounted, requires no special manifold or base
- Uses a positive displacement air-operated pump, two check valves, and a simple stroke adjustment mechanism to accurately deliver measured shots of grease with a 9:1 boost ratio.
- Includes a Hall effect sensor and magnetic piston for stroke confirmation.
- Operates with 3 way NC Air Valve

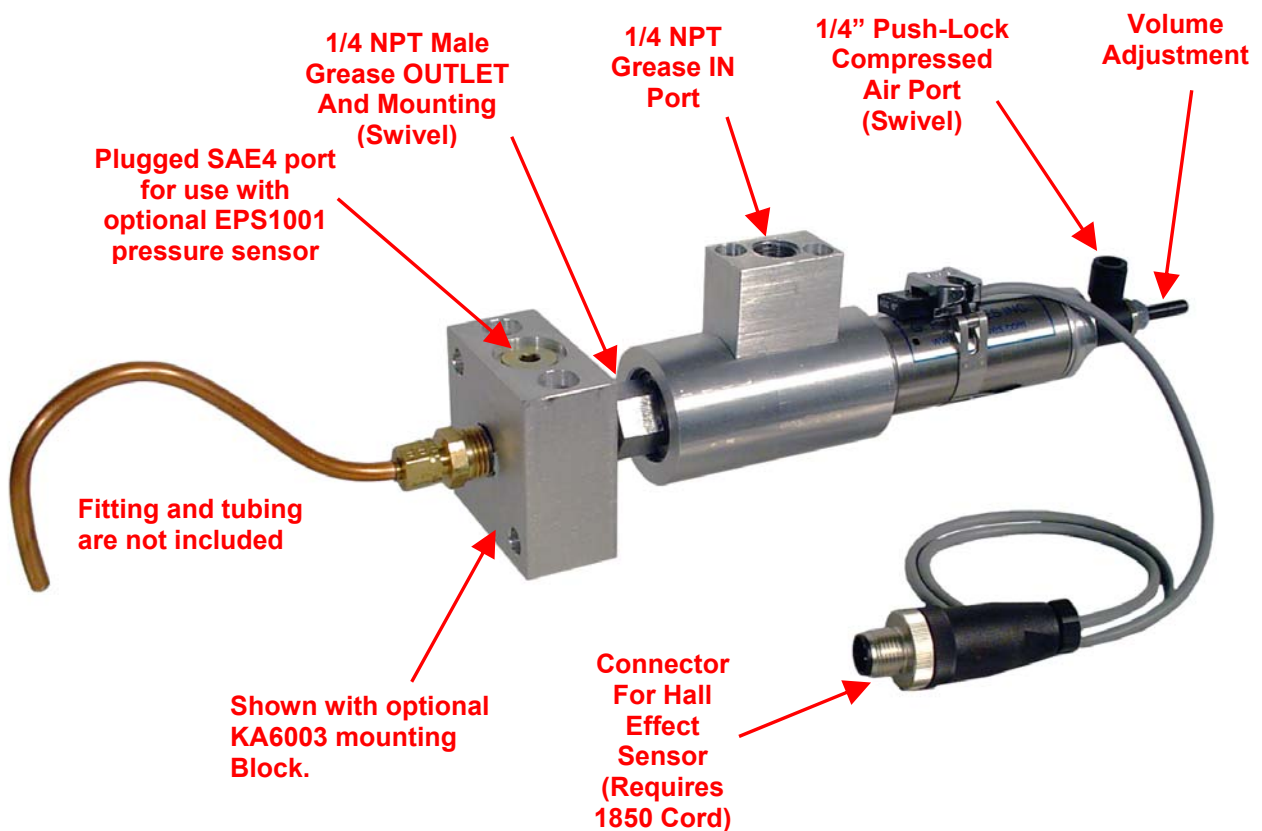

G. P. Reeves Inc. 12764 Greenly Street Holland, MI 49424

Phone: 888.399.8893

Fax: 616.399.8867

Web Site: <http://gpreeves.com>