


GPMD1508 Grease Dispenser

PLC COMPATIBLE (with optional electronic pressure sensor)

Nose-mount air-operated single-acting metered shot dispenser

- Accurate repetitive dispensing of 0.02 to 0.80 cubic centimeter shots
- Dispenser can be mounted onto any 1/4" NPT Female Port.
- Compressed Air Inlet is 1/4" Tube Push-Lock.
- Eliminates oozing or dripping problems by putting the dispenser at the dispense point.
- Swivel head allows dispenser ports to point in any direction
- Compact design allows this dispenser to be mounted at the dispense point or nozzle.
- Change shot size quickly and easily
- Operates with low pressure grease (up to 200 PSI)
- Output check valve prevents dripping or leaking
- Nose mounted - requires no special manifold or base
- Uses a positive displacement air-operated pump, two check valves, and a simple stroke adjustment mechanism to accurately deliver measured shots of grease with a 9:1 boost ratio.
- Can be used with EPS1001 Electronic Pressure Sensor to confirm that dispenser functioned and that grease was dispensed
- Operates with 3 way NC Air Valve

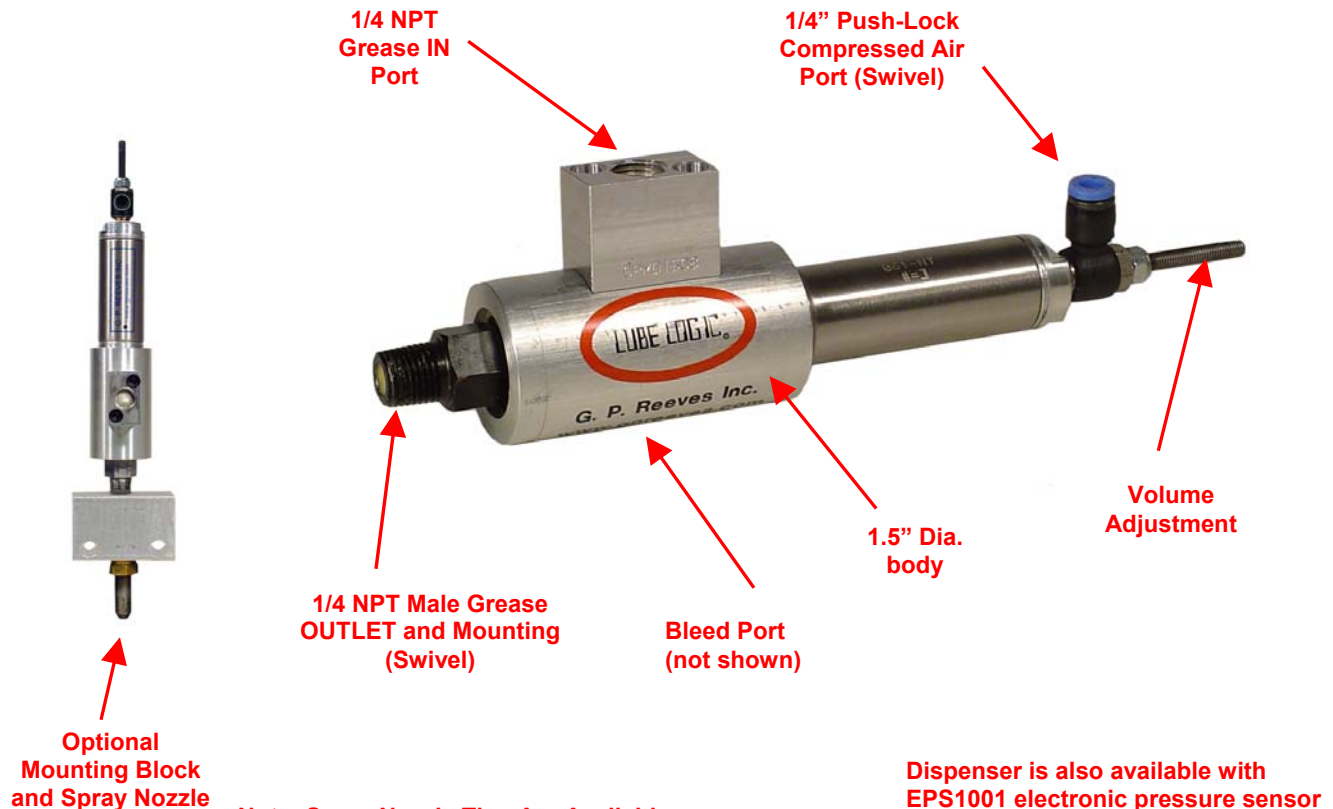

Note: Spray Nozzle Tips Are Available In Various Lengths And Styles Including 90 Degree.

G. P. Reeves Inc. 12764 Greenly Street Holland, MI 49424

Phone: 888.399.8893

Fax: 616.399.8867

Web Site: <http://gpreeves.com>